

COPILOT DYNAMIC

Regulation of Ventilation and Heating



The simplest control of maternal environment, transition, wean-to-finish, fattening....

FEATURES

- Simple
- Reliable
- Evolutionary


- High brightness display.
- Easy programming
- Surveillance
- Touch pad
- Temperature with 1/10°

- Environmental probe
- External probe
- Models:
6A – 9A – 13A – 22A

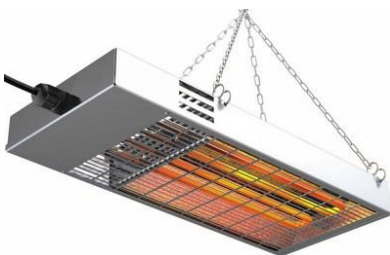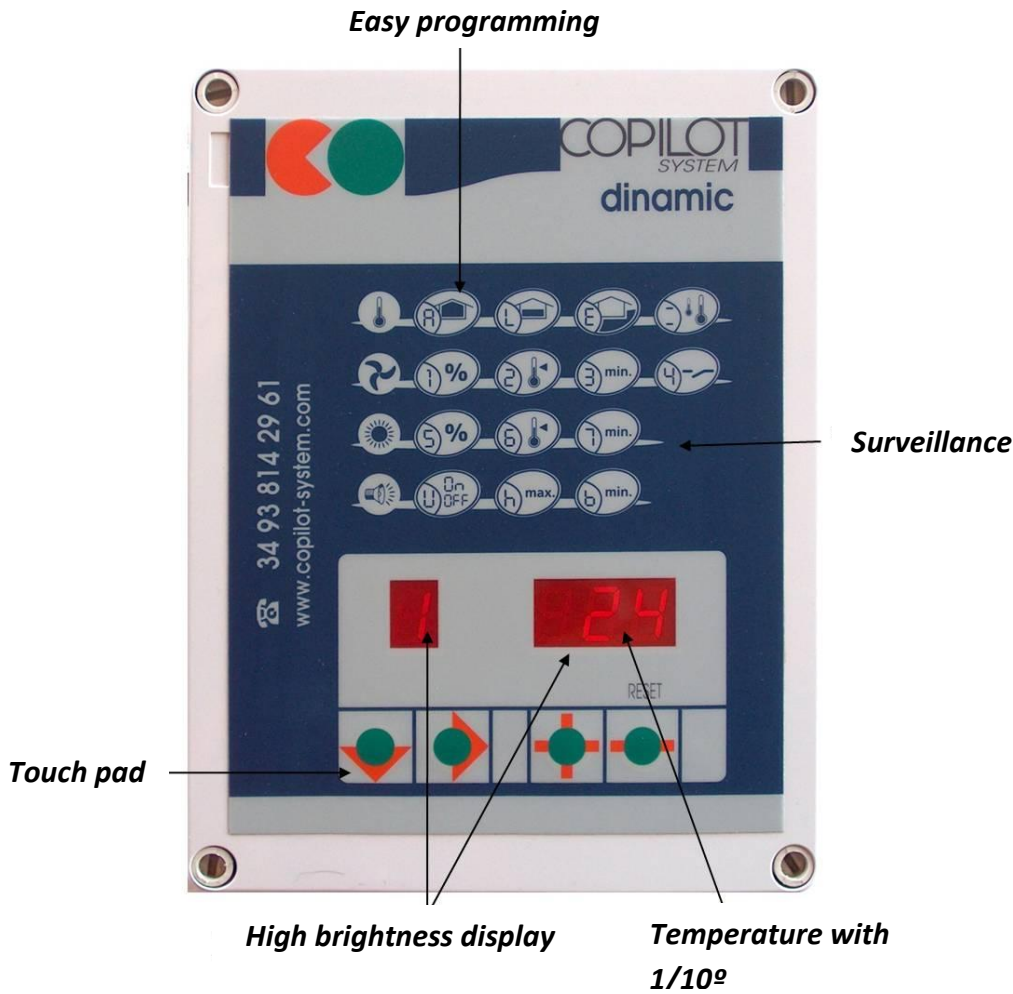

THE COPILOT DYNAMIC EXCEEDS THE REQUIREMENTS OF THE MAIN EUROPEAN LEGISLATION

TECHNICAL DATA

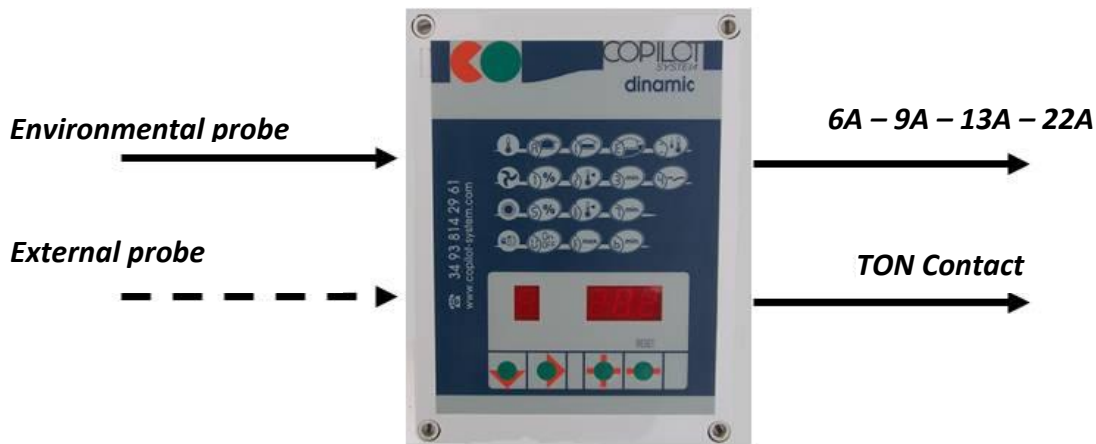


FEATURES DETAIL

- The most **comfortable handling**. The regulator COPILOT DYNAMIC controls the dynamic ventilation, and also the entry of air together with the equivalent heating and cooling. It is able to adapt to any kind of farm, with a variety of ventilation systems. The COPILOT DYNAMIC is specially designed for pig facilities, thanks to its functions to control the different variables in the maternity pen. For a easier handling, we have made the COPILOT DYNAMIC with the essential functions only. The use of the icons in the screen answers your queries effectively. Forget the manual!!
- **Optimized**. By connecting with an external temperature probe, COPILOT DYNAMIC allows to decrease in advance the level of ventilation; as a results of this the temperatures are more stable and the cold air draughts disappear. In addition, several COPILOT DYNAMIC regulators share the same external probe.
- **Reliability**. The most advanced protection systems are installed in the COPILOT DYNAMIC series, ensuring exceptional reliability. In addition, each regulator controls the safety of your livestock with the monitoring functions: temperature, power supply and power consumption (the latter is optional).
- **Modular with adjusted price**. COPILOT DYNAMIC is able to fit your needs, according to the characteristics of your farm, thanks to the different optional cards. Thus, you only pay for what you need and nothing more.
To make easier the after sales service for your installer, COPILOT DYNAMIC shares the same components with the other models in the COPILOT CONTROL range.

EXPANSION CARDS

Consumption monitoring



- 2 TON contacts
- 2 meter inputs

Up to 3 additional cards!

Communication and/or centralization



- PC modem
- Red RS485

Heating and cooling



- 2 TON contacts
- 2 exits 0-10V
- Local temperature
- Hygrometry

Consumption surveillance



- Entrance and Exit for A4 ventilation

THE COPILOT DYNAMIC EXCEEDS THE REQUIREMENTS OF THE MAIN EUROPEAN LEGISLATION